KOHLER

# Composed® | K-103C37-SANA

Touchless single-hole lavatory faucet with Kinesis® sensor technology and temperature mixture, AC-powered, 0.5 gpm

## Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Requires single or multiple AC adapter unit (sold separately)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant aerator
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Grid drain
- Includes concealed mechanical mixer
- Complies with the Safe Drinking Water Act (SDWA)



## Sustainability

WATER-SAVING DESIGN

## Available Colors/Finishes

***Color tiles intended for reference only.***

| | | |
|---|---|---|
| | CP | Polished Chrome |
| | BN | Vibrant Brushed Nickel |
| | BL | Matte Black |
| | 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
11-03-2026 16:10 - US-CA

THE BOLD LOOK OF KOHLER

KOHLER. Touchless single-hole lavatory faucet with Kinesis® sensor technology and temperature mixture, AC-powered, 0.5 gpm

## Codes/Standards

***ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.***

ADA | CSA B651 | OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

## Technical Information

***All product dimensions are nominal.***

### Spout

| | |
|---|---|
| Spout Reach: | 5-13/16" (147 mm) |

### Flow Rate

| | |
|---|---|
| Faucet Flow Rate: | 0.5 gpm (1.9 l/min) |

## Material

- Brass construction spout
- Cast brass valve

## Included Components

- K-7129-A Bathroom sink grid drain with overflow (QTY 1)

## Recommended Products/Accessories

- [object Object]23726 Drain treatment
- K-23723 Faucet cleaner

## Required Products/Accessories

- K-13480 AC single supply, global outlets

or

- K-13480-A AC single supply, North American outlets

or

- K-13481 Multi-outlet power supply, global outlets

or

- K-13481-A Multi-outlet power supply, North American outlets

## Optional Products/Accessories

- K-13478-A 4" escutcheon plate for Insight™ and Kinesis® faucet
- K-13478-B 4" escutcheon plate for Insight™ and Kinesis® faucet
- K-13479-A 8" escutcheon plate for Insight™ and Kinesis® faucet
- K-13479-B 8" escutcheon plate for Insight™ and Kinesis® faucet

## Technology

- Kinesis® sensor technology offers on-demand detection for maximum water savings

## Warranty

***See website for detailed warranty information.***


KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
11-03-2026 16:10 - US-CA

THE BOLD LOOK OF KOHLER.

KOHLER. Touchless single-hole lavatory faucet with Kinesis® sensor technology and temperature mixture, AC-powered, 0.5 gpm

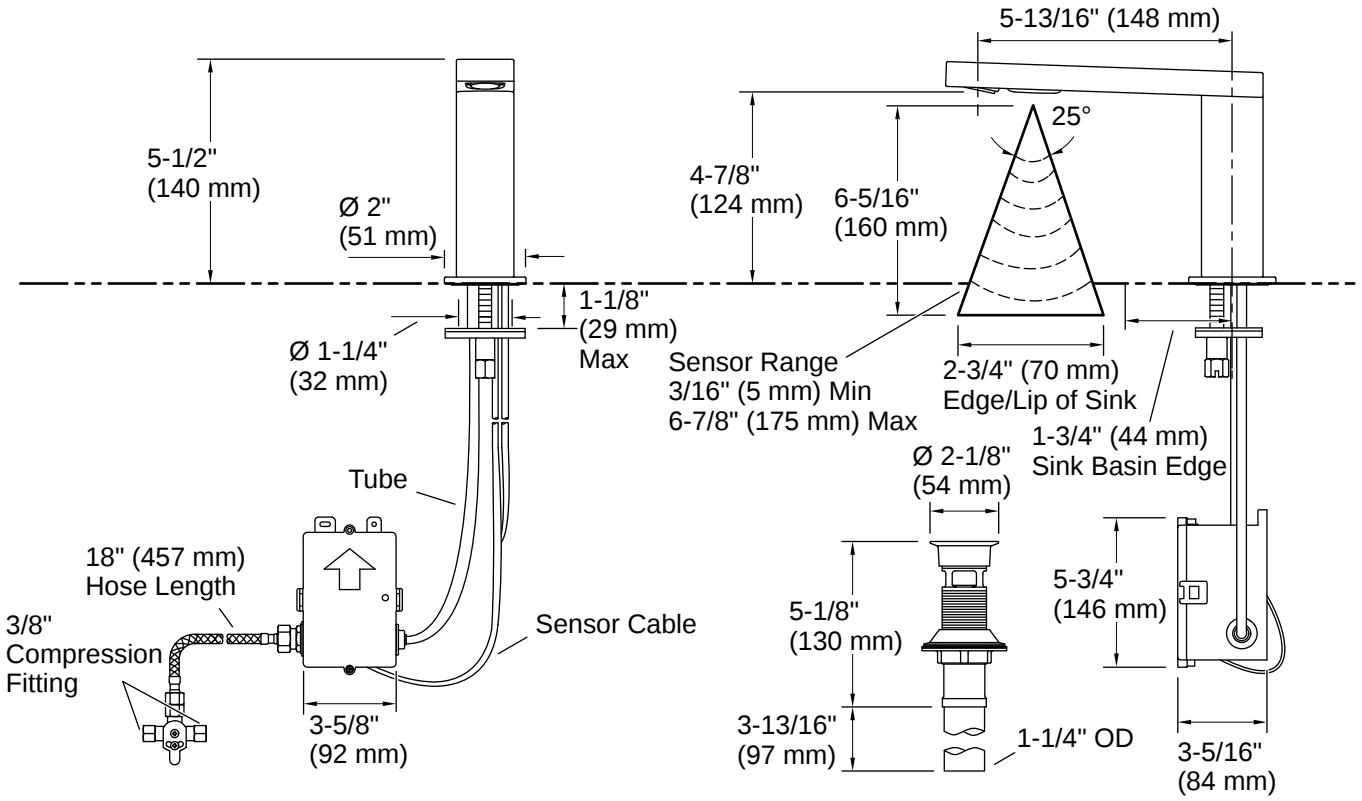


## Installation

- Single-hole mounting
- Includes spout assembly, grid drain, control box assembly, supply hose, mixer and standard mounting hardware

## Installation Notes

***Install this product according to the installation instructions.***

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.
The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.
The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).
This product requires an AC power supply (not included).
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
11-03-2026 16:10 - US-CA

THE BOLD LOOK OF KOHLER.