Mach® Tripoint® | K-10TD00N10-RF

Touchless retrofit toilet flushometer, DC-powered, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- No external flush volume adjustment ensures water conservation
- 125-micron filter protects internal components
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Powered by 1.5 V AA lithium batteries
- Less stop valve and tailpiece
- Patented piston technology for superior flush volume accuracy



Sustainability

Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-09-2026 07:06 - US-CA

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA | CSA B651 | OBC

ASME A112.18.1/CSA B125.1
ASSE 1037/ASME A112.1037/CSA B125.37
ADA
ICC/ANSI A117.1
CSA B651
OBC

Valves

Included Valve:	Volume Control

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	25 psi (172.4 kPa)
Minimum Flow Rate:	25 gpm (94.6 l/min)

Material

- Brass construction with durable Polished Chrome finish

Recommended Products/Accessories

- 1421939 Extension Kit
- 1509698 Assembly, Fv Pressure Gauge, 1/8"
- K-23723 Faucet cleaner

Optional Products/Accessories

- GP1118986 FLUSHOMETER EXTENSION KIT
- K-10313 Flushometer 12" rough-in kit

Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-09-2026 07:06 - US-CA

THE BOLD LOOK OF KOHLER.

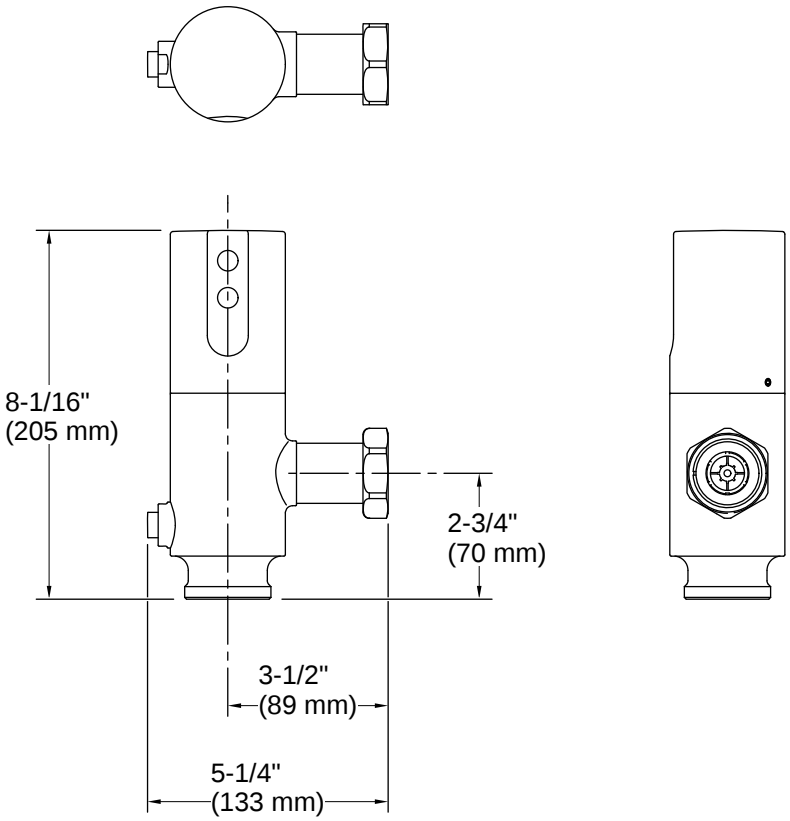

Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-09-2026 07:06 - US-CA

THE BOLD LOOK OF KOHLER.