KOHLER®

Sculpted | K-13461

Touchless single-hole lavatory faucet with Insight™ sensor technology, DC-powered, 0.5 gpm

Features

- Vandal-resistant aerator
- 24" (610 mm) flexible supply hose for easy installation
- Stationary spout
- Without temperature mixer
- Includes two AAA batteries
- Less drain
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability

WATER-SAVING DESIGN

CERTIFIED

Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome
VS Vibrant Stainless

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:07 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Spout

Spout Reach:	5" (127 mm)

Flow Rate

Faucet Flow Rate:	0.5 gpm (1.9 l/min)

Valves

Included Valves:	UltraGlide, Thermostatic Mixer

Material

- Brass

Recommended Products/Accessories

- [object Object]23726 Drain treatment
- K-23723 Faucet cleaner


Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:07 - US-CA

THE BOLD LOOK OF KOHLER.

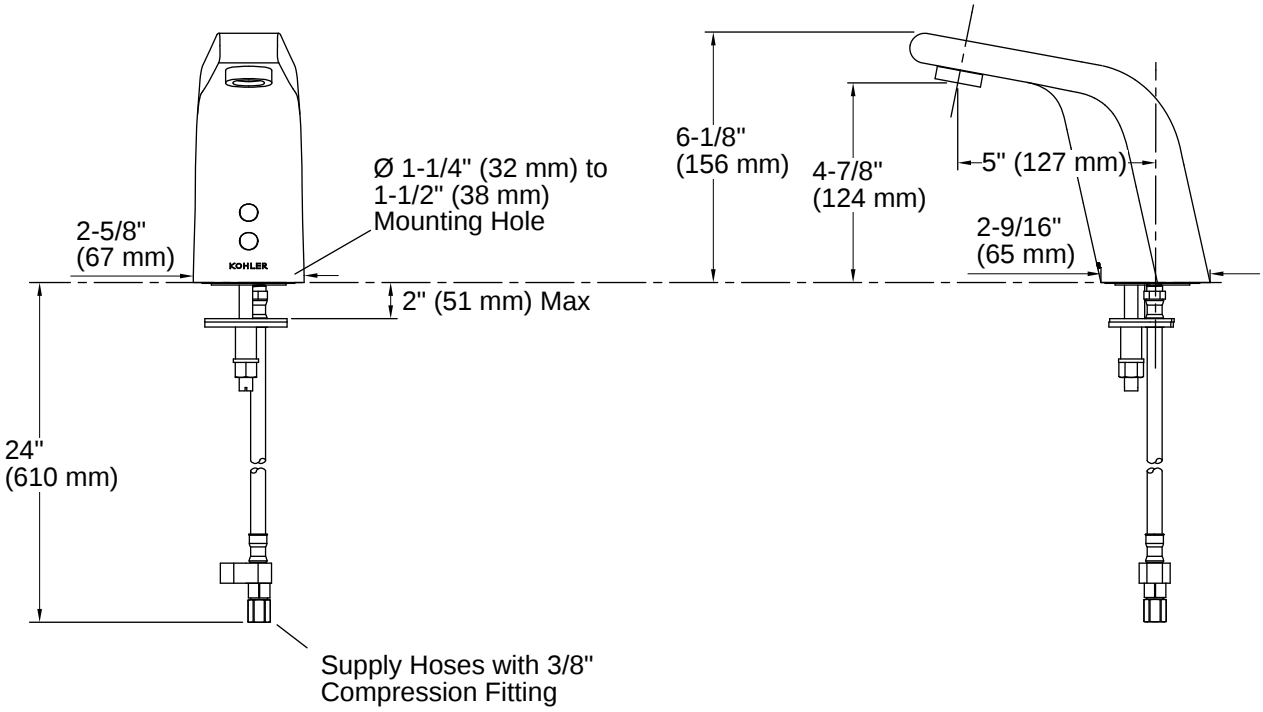

Installation

- Single-hole mounting
- Above-counter battery and valve for easy installation and maintenance

Installation Notes

Install this product according to the installation instructions.

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.
The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.
The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).
The maximum height of the lip basin should be 3/4" (19 mm).
Product includes rosebud spray aerator. Other aerator styles are available.
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
10-27-2026 17:07 - US-CA

THE BOLD LOOK OF KOHLER