

FEATURES

- INTEGRITY SYSTEM™ optimizes cleaning power through advanced water flow, ensuring an improved flush performance and enhanced bowl wash with our ultra high-efficiency TORNADO FLUSH® bowl design - 1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate WASHLET®+
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Elongated front bowl with SoftClose® seat
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS686124CUFG (#01)**
With CEFIONTECT ceramic glaze & includes SS124 SoftClose seat
- **MS686124CUF (#51)**
Same as MS686124CUFG without CEFIONTECT
- **MS686124CUFRG (#01)**
Same as MS686124CUFG with right hand trip lever

OPTIONAL COMPONENTS

- **TSU49.10**
10" Unifit Rough-In
- **TSU49.14**
14" Unifit Rough-In
- **THU897(#BN, #PN, #PB, #01, #MBL)-A**
Trip Lever (Brushed Nickel, Polished Nickel, Polished Brass, Cotton, Matte Black)

COLORS/FINISHES

- #01 Cotton
- #51 Ebony (Without CEFIONTECT glaze)

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency INTEGRITY SYSTEM toilet shall be 1.0 GPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS686124CUF(R)(G) #__.



INTEGRITY SYSTEM™

- **1G** ONE GALLON PER FLUSH 
- **U** UNIVERSAL HEIGHT 
- **T** TORNADO FLUSH 
- **C** CEFIONTECT 
- **S** SKIRTED DESIGN 

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MS686124CUF(R)(G)

Aurora™ 1G® One-Piece Toilet - 1.0 GPF


SPECIFICATIONS

Water Use	1.0 GPF (3.8 LPF)
Flush System	INTEGRITY SYSTEM™
Min. Water Pressure	15 psi (Flowing) at 2.64 Gal/min
Water Surface	9" x 6-1/4"
Trap Diameter	2-1/2"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	132 lbs
Shipping Dimensions	30-7/8" L x 22-5/8" W x 18-1/2" H1 x 29" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

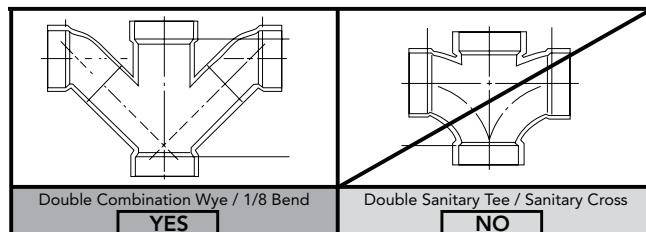

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drainline slope of 2% with maximum linear runs of 60ft.

DIMENSIONS

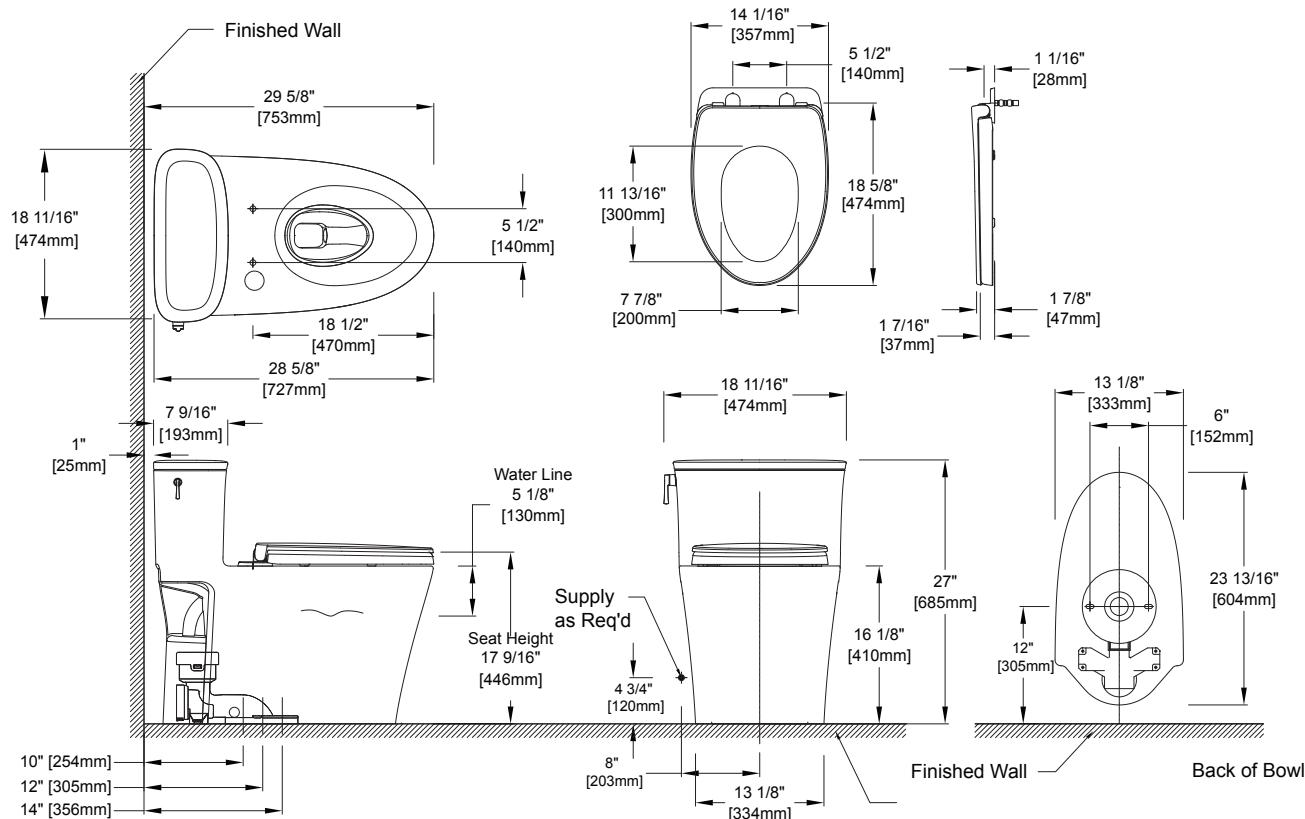

TOTO®

These dimensions and specifications are subject to change without notice